

aurora SERIES


High Performance Half Cut Mono Perc PV modules

132 Cell / 144 Cell | 10 BB Module

**Mono PERC Half Cut
BIFACIAL Module**

GS 500W & 550W

DCR Modules

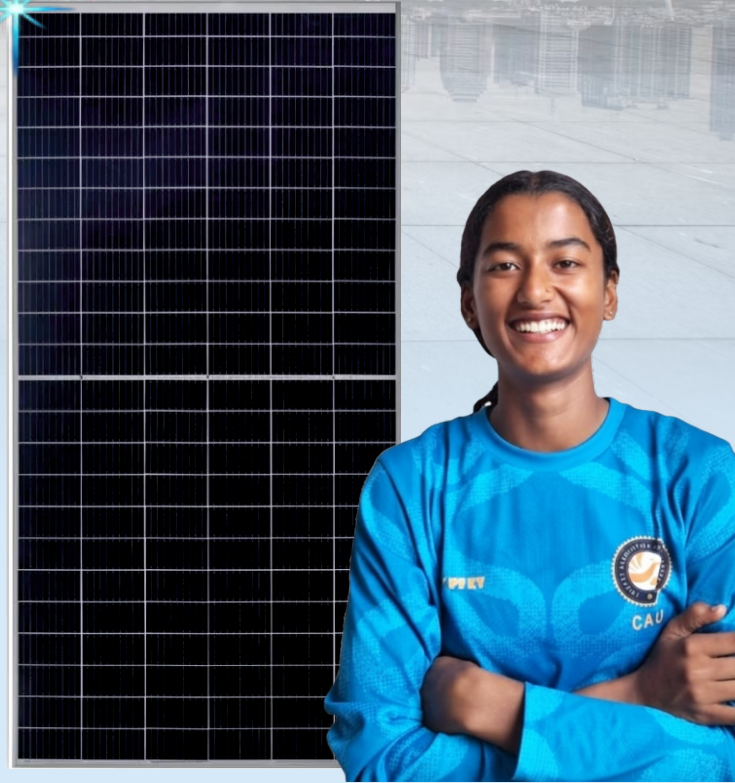

Ideal for large scale installations



More power with Bifacial



Better shading tolerance



Lower LCOE & system cost



Excellent temperature performance



Non-destructive cutting

Green Solar Aurora series modules produces power from the front & backside.

Aurora series modules can produce up to 30% more power from backside than mono facial modules.

Module
Efficiency
up to
21.06%

Power
Tolerance
up to
4.99W

30 Years
Performance
Warranty

10 Years
Product
Warranty

PID
Resistant

aurora SERIES



High Performance Half Cut Mono Perc PV modules

DCR Modules

ALMM Approved Solar PV Module



Heavy Quality Frame
30mm x 35 mm

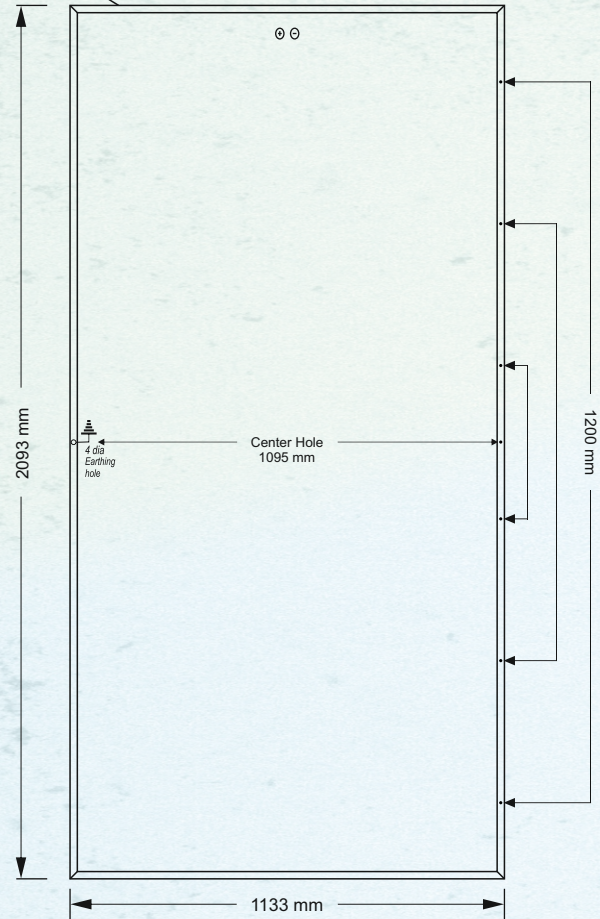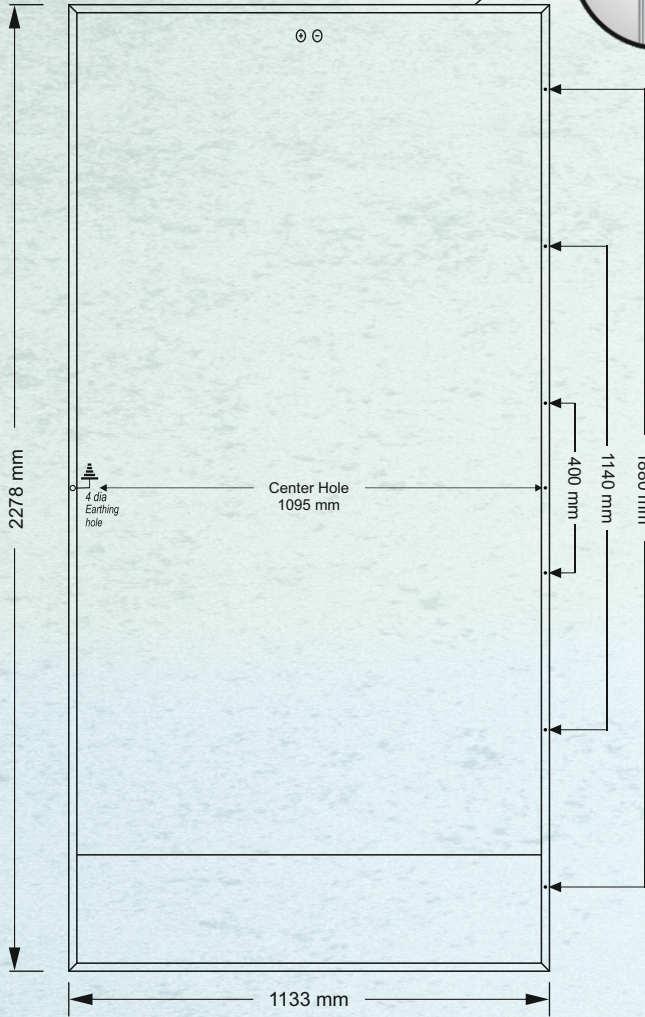

550 Watt **24 Volt**

Pmax	550/24	Model	M-10 550W
Imp	12.80 A	Isc	13.62 A
Vmp	42.97 V	Voc	50.36 V
Max System Voltage	1500V	Max Series Fuse Rating	25 A
Power Tolerance	0-4.99w	Weight	29 Kg
Safety Class	II	Module Efficiency	21.96 %
Application Class			A
Dimension (L*W*H)	2278x1134x35mm		
All Technical Data at STC, AM = 1.5, E = 1000W /m ² , Tc = 25C°			

500 Watt **24 Volt**

Pmax	500/24	Model	M-10 500W
Imp	12.51 A	Isc	13.43 A
Vmp	39.99 V	Voc	44.98 V
Max System Voltage	1500V	Max Series Fuse Rating	25 A
Power Tolerance	0-4.99w	Weight	26.5 Kg
Safety Class	II	Module Efficiency	21.45 %
Application Class			A
Dimension (L*W*H)	2093x1134x35mm		
All Technical Data at STC, AM = 1.5, E = 1000W /m ² , Tc = 25C°			